



MP025 dNF80

Technical Datasheet

Nanofiltration membrane module for water and wastewater applications

Technical datasheet



MP025 dNF80

Nanofiltration membrane module for water and wastewater applications

Product description

The MP025 dNF80 nanofiltration modules have the following features:

- For lab scale test units
- Excellent removal of color and dissolved organics, including micropollutants
- O Inside-out operation in a cross-flow filtration mode
- Excellent pH and chlorine tolerance

Membrane specifications

Membrane material Modified PES

MWCO ¹ 800 Dalton

Min. MgSO4 rejection ² 76%

Membrane charge Negative @ pH=7

Membrane fiber inner diameter 0.7 mm

Typical operating ranges

Max. system pressure ³	10 bar
Max. transmembrane pressure ³	6 bar
Max. backwash pressure ³	6 bar
Max. temperature during operation & cleaning	40°C
pH range during operation	2-12
pH range during cleaning	1-13

Max. active chlorine concentration 500 ppm @ pH>10

Max. cumulative active chlorine exposure 250,000 ppm-hours @ pH>10 Cross-flow velocity range 0.1 - 2.0 m/s (16 - 310 L/h)

Feed water specifications

Max. TSS	300 ppm
Max. turbidity	150 NTU
Max. particle size	150 µm

¹ Molecular Weight Cut-Off (MWCO) is an estimation as it depends on size, shape, charge and polarity of the compound being tested, as well as test conditions.

² Test conditions: 5.0 mMol/L MgSO4, 3.0 bar, 25°C, v=0.5 m/s

³ Maximum pressures at 20°C.



MP025 dNF80

Nanofiltration membrane module for water and wastewater applications

Module specifications

Membrane Surface Area 0.050 m²

Module Dimensions

L1 300 mm D1 25 mm L2 37 mm D2 6 mm L3 23 mm D3 24 mm

Materials of construction


Housing PVC transparent


Internals None

Material Epoxy resin

Assembly⁴

- 1. Module
- 2. Endcaps (Material: PP)
- 3. O-rings (Material: EPDM) size: 23.39 × 3.53 mm

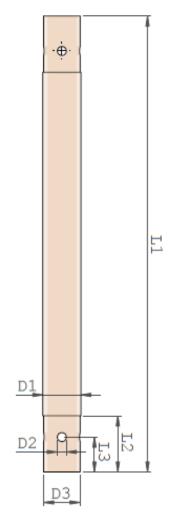

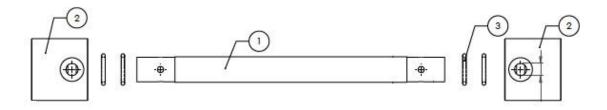

⁴ Assembly components not included in the scope of supply of a MP025 dNF80 module. Please contact NX Filtration for the purchase of a complete assembly kit.



Technical datasheet

MP025 dNF80

Nanofiltration membrane module for water and wastewater applications

Release MP025-SMA dNF80-TDS 20200828 (replaces MP025 dNF80-TDS 20200611)

+61 2 9089 8833 info@hydroflux.com.au www.hydrofluxindustrial.au

The statements, technical information and recommendations contained herein are believed to be accurate at the date of publication. Since the conditions and methods of use of the product and/or the information referred to herein are beyond our control, NX Filtration B.V. expressly disclaims any and all liability as to any results obtained from or arising out of any use of the product and/or reliance on such information. NO WARRANTIES OR GUARANTEES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MECHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OF TITLE, OF NONINFRINGEMENT OF THIRD PARTY RIGHTS OR ANY OTHER WARRANTY ARE MADE CONCERNING THE PRODUCTS DESCRIBED AND/OR THE INFORMATION PROVIDED HEREIN.